



OMNIDRIVE

"C" Frame - Skeleton Motors


Heating, Refrigeration & Ventilation Motors




SS3100

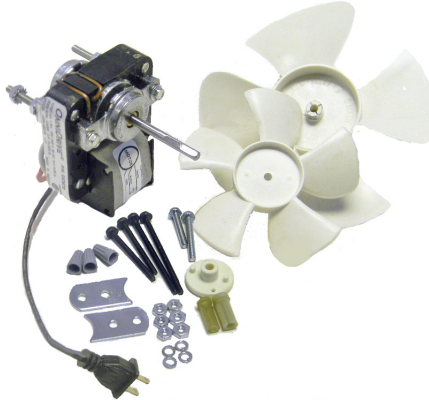


SS3670




SS617 - SS630 - SS3103
SS604 - SS611




SS601 - SS603 - SS613




SS605



SS610



SS3101



SS635

- All Angle Mount
- Continuous Duty, Air Over
- Class 'B' Insulation
- UL Listed & CSA Approved
- Mechanically Reversible
- Shaded Pole
- Impedance or Thermally Protected
- One & Two speed
- 60 Hz.
- Sleeve Bearings

Stock #	Stack	Volts	Amps.	RPM	Rotation	Shaft	Comments
SS617	3/8"	208-240	0.22	1900	CWSE	3/16" x 1-1/4"	"C" Groove on Shaft 12" Leads w/ Terminals
SS611	1/2"	120	0.60	1500	CCWSE	3/16" x 1-5/8"	"C" Groove on Shaft 8" Cord & Plug
SS630	1/2"	120	0.75	3000	CCWSE	7/32" x 1-13/16"	"C" Groove on Shaft 6" Cord & Plug
SS603	5/8"	120	0.63	2400	CCWSE	7/32" x 2-1/8"	"C" Groove on Shaft 10" Cord & Plug
SS604	5/8"	120	0.78	2700	CCWSE	3/16" x 1-3/16"	Round Shaft 9" Cord & Plug
SS613	5/8"	120	0.56	1600	CCWSE	7/32" x 2-7/16"	2 "C" Groove on Shaft 10" Cord & Plug
SS3100	5/8"	115	0.59	3000	CCWSE	7/32" x 1-11/16"	Includes Paddle Fan Blade
SS3670	5/8"	120 / 240	0.40 / 0.26	3000	CWSE	3/16" x 1-9/16"	Fan Kit and Mounting Accessories
SS601	3/4"	120	0.75	3000	CCWSE	1/4" x 2-5/16"	Includes 1/4" to 5/16" Bushing 6" Cord & Plug
SS3103	3/4"	120	0.81	3000	CCWSE	7/32" x 2-7/16"	Breakaway Shaft 15" Cord & Plug
SS605	7/8"	120	1.00	2800	CCWSE	3/16" x 1-3/4"	30" Leads
SS610	7/8"	120	1.20 / 0.75	2400 / 2	CCWSE	7/32" x 1-3/16"	"C" Groove on Shaft - 2 Speed
SS3101	7/8"	120	0.70	3000 / 2	CWSE	7/32" x 1-15/16"	"C" Groove on Shaft - 2 Speed
SS635	1-1/2"	208-240	1.20 / 0.83	1550	CCWSE	1/4" x 1-1/2"	12" Leads with Terminals

