



OMNIDRIVE

Close Coupled Pump Three Phase Motors Rolled Steel ODP & TEFC

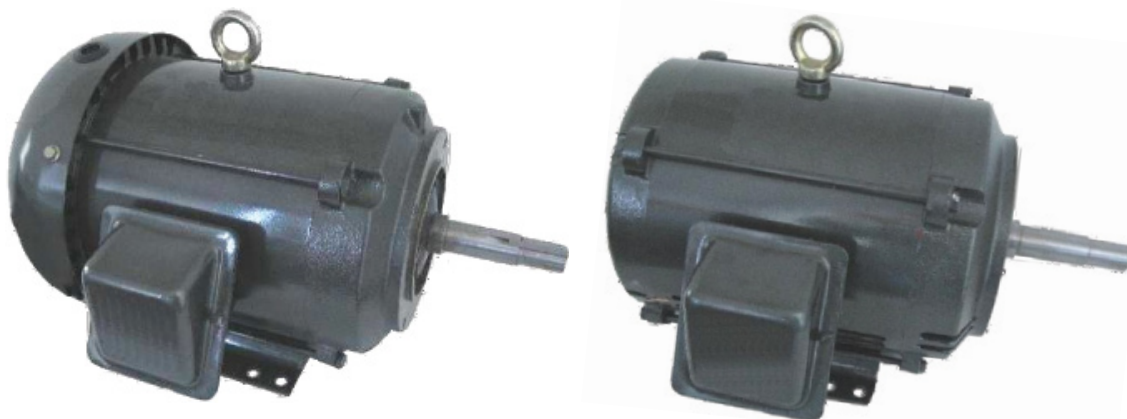

All Models



- Rolled Steel Construction
- Ball Bearings
- Rigid Base - Dual Mounting Holes
- Class 'F' Insulation
- UL Listed & CSA Approved
- 40°C Ambient

Stock #	Frame	HP	Volts	Amps.	RPM	"C"	S.F.	Comments
JM617	145JM	3	575	3.10	3600	15.75"	1.15	TEFC
JM627	145JM	3	575	3.20	3600	14.40"	1.15	ODP
JM607	182JM	3	575	3.00	3600	18.10"	1.15	TEFC
JM657	182JM	3	575	3.20	1800	18.10"	1.15	TEFC
JM608	184JM	5	575	4.70	3600	18.10"	1.15	TEFC
JM658	184JM	5	575	5.20	1800	18.10"	1.15	TEFC
JM629	184JM	7.5	575	7.10	3600	18.50"	1.15	ODP
JM659	213JM	7.5	575	7.30	1800	21.50"	1.15	TEFC
JM60A	215JM	10	575	9.44	3600	20.00"	1.15	TEFC
JM65A	215JM	10	575	10.00	1800	21.50"	1.15	TEFC

