


OMNIDRIVE

48 Frame

Split Phase Belt Drive Motors

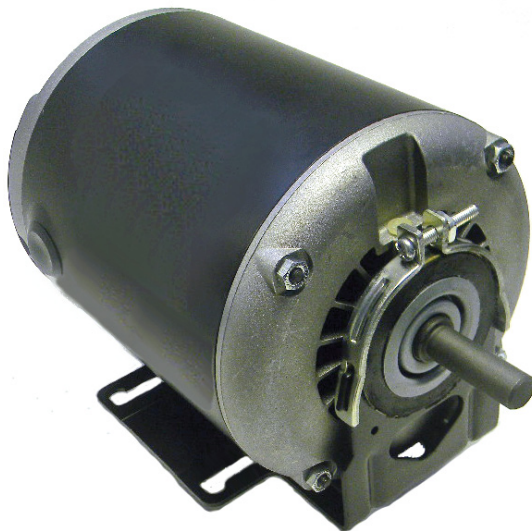

All Models

- 60 Hz
- Reversible Rotation
- Single Speed
- 40°C Ambient Rating
- Class 'B' Insulation
- Resilient Base has 48 & 56 Frame Mounting Holes
- Open Drip-Proof
- Single & Dual Voltage
- Automatic Overload
- Continuous Duty
- 1/2" to 5/8" Sleeve & Key Included
- (•) Indicates Motors are Ball Bearing

Stock #	Frame	HP	Volts	Amps.	RPM	"A"	Shaft	Rotation	Hz.
SS933	48Y	1/4	115	4.80	1725	6.81"	1/2" x 1.50"	REV.	60
SS934	48Y	1/3	115	6.60	1725	6.81"	1/2" x 1.50"	REV.	60
SS935	48Y	1/2	115	8.30	1725	7.76"	1/2" x 1.50"	REV.	60
SS934B •	48Y	1/3	115	6.60	1725	6.81"	1/2" x 1.50"	REV.	60
SS935B •	48Y	1/2	115	7.60	1725	6.81"	1/2" x 1.50"	REV.	60
SS933D •	48/56	1/4	115/208-230	4.60/2.20-2.10	1725	6.75"	1/2" x 1.88"	REV.	60
SS934D •	48/56	1/3	115/208-230	6.60/3.40-3.10	1725	6.75"	1/2" x 1.88"	REV.	60
SS935D •	48/56	1/2	115/208-230	7.60/3.70-3.80	1725	8.58"	1/2" x 1.88"	REV.	60
SS936D •	56H	3/4	115/208-230	11.60/5.90-5.80	1725	10.55"	5/8" x 1.88"	REV.	60

