


# OMNIDRIVE

## Penn Ventilator (Zephyr) OEM Replacement Motors

 New Product

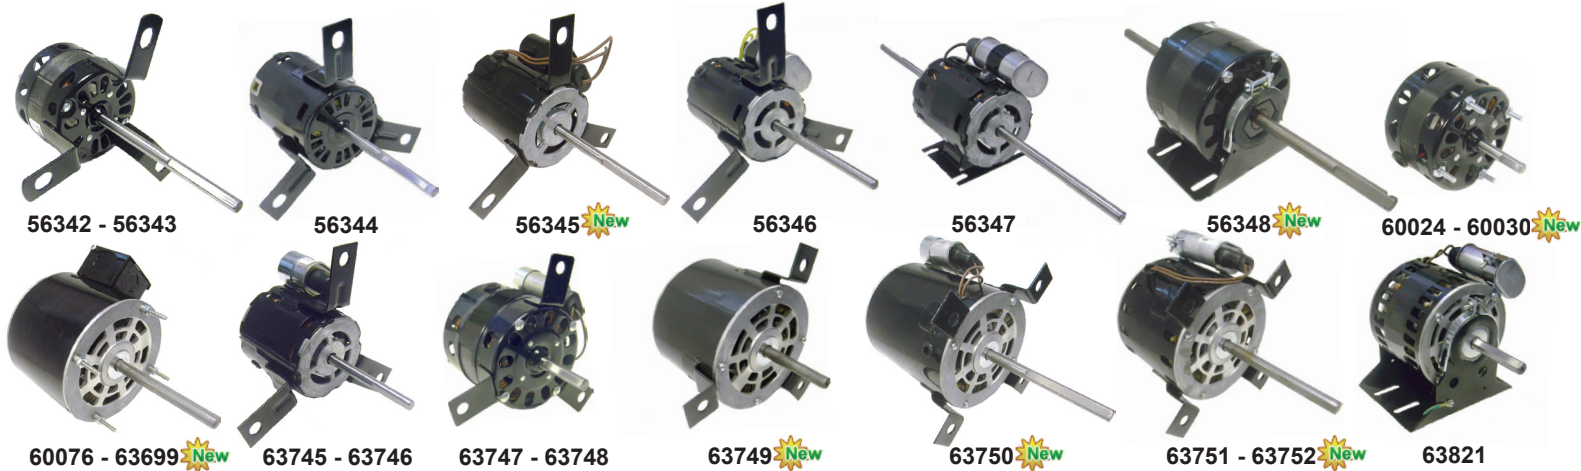

- Drop in Replacement for many Penn / Zephyr OEM Motors
- Long Life Self Aligning Sleeve or Sealed Ball Bearings
- Shaded Pole & P.S.C. (Capacitor Included)
- Open Air-Over Design
- Wiring Harness with Plug supplies
- (~) Indicates Motors are Double Shafted
- (\*) Indicates Motors are P.S.C Design & (•) Indicates Motors are Ball Bearing

Stock #	Diameter	HP	Volts	Amps.	RPM	"A"	Shaft	Rotation	Replaces
56342	3.3"	1/70	115	1.00 / 0.50	1550/2	2.46"	3/8" x 5-1/2"	CWSE	56342-0
56343	3.3"	0.27	115	1.32	1550/2	2.46"	3/8" x 5-3/4"	CWSE	56343-0, JA2M414
56344 •*	3.3"	0.08	115	1.60 / 1.00	1550/2	4.11"	3/8" x 4.75"	CWSE	56344-0, JE2H047
56345 *	3.3"	1/25	115	1.00	1050	4.80"	3/8" x 4.75"	CWSE	56345-0
56346 •*	3.3"	0.27	115	3.20 / 1.90	1550/2	4.62"	3/8" x 5.50"	CWSE	56346-0, JE2K007
56347 ~*	3.3"	1/12	115	1.60	1050	4.14"	6.10" x 3/8" x 6.10"	CCWLE	56347-0
56348 ~	5.0"	1/10	115	3.90	1050	3.62"	6-1/4" x 1/2" x 6-1/4"	CCWLE	56348-0
60024	3.3"	1/30	115	1.40	1550	2.75"	5/16" x 1-1/2"	CWSE	60024-0
60030	3.3"	1/80	115	0.74	1400	2.17"	1/4" x 1-3/4"	CWSE	60030-0
60076 •*	5.5"	1/6	115	3.40	1300/2	4.34"	1/2" x 2.65"	CWSE	60076-0
63699 •*	5.5"	1/4	115	3.40	1725	4.37"	1/2" x 4.77"	CWSE	63699-0
63745 *	3.3"	1/30	115	0.50 / 0.40	1550/2	3.54"	3/8" x 3.69"	CWSE	63745-0
63746 •*	3.3"	1/12	115	1.50 / 0.90	1550/2	4.10"	3/8" x 3.40"	CWSE	63746-0, JE2H057
63747 *	4.4"	1/7	115	2.50	1550/3	4.00"	1/2" x 2.20"	CWSE	63747-0
63748 *	4.4"	1/6	115	1.80	1550/3	4.00"	1/2" x 2.60"	CWSE	63748-0
63749 •*	5.5"	1/4	115	2.80	1725	4.52"	1/2" x 3.00"	CWSE	63749-0
63750 •*	5.5"	1/3	115	4.00	1550/3	6.00"	1/2" x 5.55"	CWSE	63750-0
63751 •*	5.5"	1/2	120	5.00	1650/2	4.27"	1/2" x 5.50"	CWSE	63751-0
63752 •*	5.5"	3/4	115	8.60 / 9.60	1625	5.72"	1/2" x 5.33"	CWSE	63752-0
63821 •*	4.4"	1/4	115	2.70	1550	5.00"	1/2" x 2.60"	CCWSE	63821-0

